

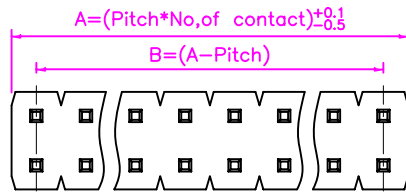
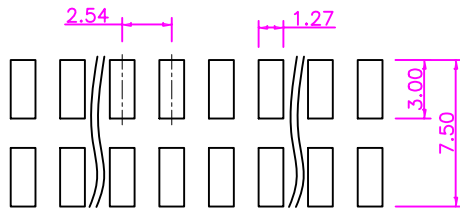


CTP-01AB1-2XXC0-XX-011

REV. B

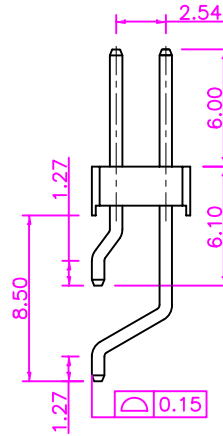

PIN HEADER SERIES
 2.54 X 2.54mm PITCH, TWO ROWS
 SMT FOR PCB MOUNT, RIGHT ANGLE

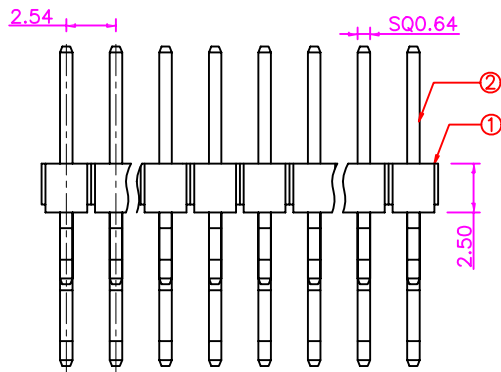

P.C.B LAYOUT

L=12.4/19.4mm

PART NUMBER

CTP - 01AB1 - 2 XX C 0 - XX - 0 1 1

SERIES | TWO ROWS | NUMBER PER ROW (01 ~ 40 POS.) | H. X W. C: 2.5 X 5.0 | TAIL PLATED OPTION | 1: GOLD FLASH | 6: 30u" GOLD PLATED | (CONTACT PLATED OPTION) | 1: GOLD FLASH | 6: 30u" GOLD PLATED | POST OPTION | 0: WITHOUT POST

RoHS COMPLIANT
 EU Directive 2002/95/EC

LTR	Part Name	Material	Description	QTY
1	Housing	NY-6T UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass C2600	Current Rating : 3.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX
TOLERANCES XX ±0.3 X.XX ±0.2 X.XXX ±0.1 Angle ±5°				
Temperature Rating : -40°C ~ +125°C . Dielectric Withstanding Voltage : 1000V AC/Min				



Phone 1-800-809-2751

Fax 1-510-440-0579

www.connect-tech-products.com • info@connect-tech-products.com

4428 Technology Drive • Fremont, CA 94538, USA • 510-498-8815 • Fax: 510-440-0579