


CTP-BR-1510

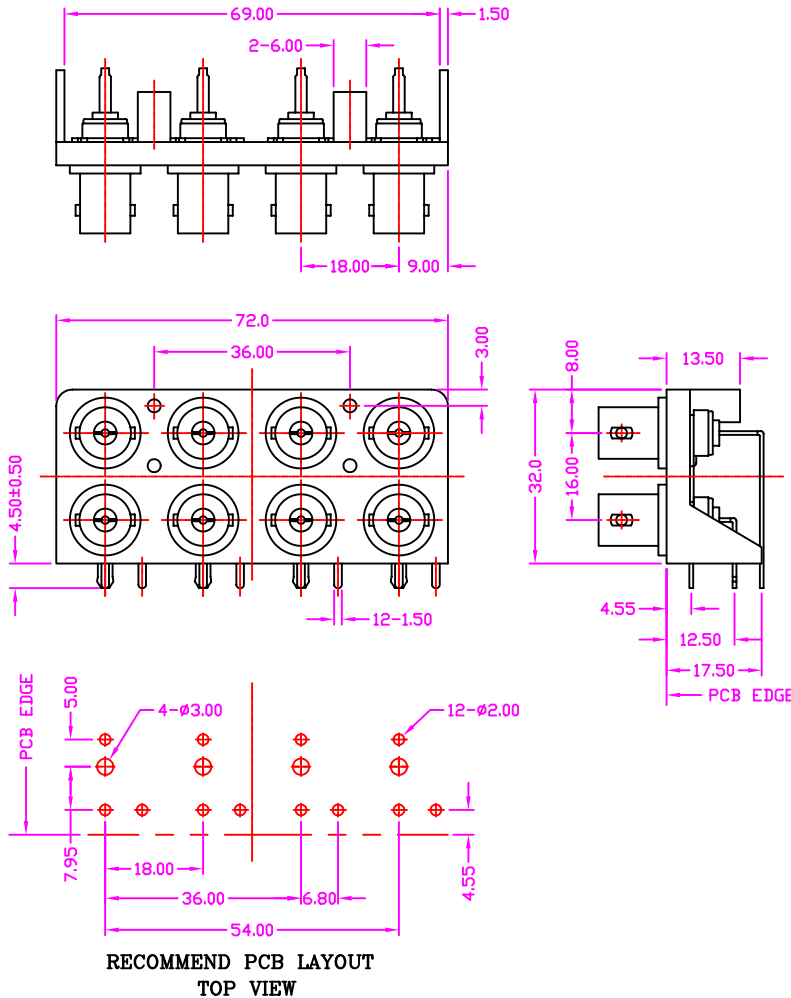

STACKED BNC SERIES
PCB MOUNT, RIGHT ANGLE
2x4 PORT, 50 OHM, FEMALE

MATERIALS

1. INSULATOR : POM UL94HB, WHITE
2. FRONT BODY : ZINC, NICKEL PLATED
3. NEAR BODY : ABS UL94V-0, BLACK
4. CONTACT : COPPER ALLOY
5. POST : BRASS, NICKEL PLATED

OTHER INFORMATION

1. CONTACT RESISTANCE : 3.0m OHMS MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE :
500V AC RMS FOR 1 MINUTE
3. INSULATION RESISTANCE :
5000M OHMS MIN. AT 500V DC FOR 1 MINUTE
4. OPERATING TEMPERATURE : -40°C ~ +85°C

TOLERANCES

X.X ±0.3
X.XX ±0.2
X.XXX±0.1
Angle ±5°



Phone 1-800-809-2751

Fax 1-510-440-0579

www.connect-tech-products.com • info@connect-tech-products.com

4428 Technology Drive • Fremont, CA 94538, USA • 510-498-8815 • Fax: 510-440-0579