


CTP-J-S354-E

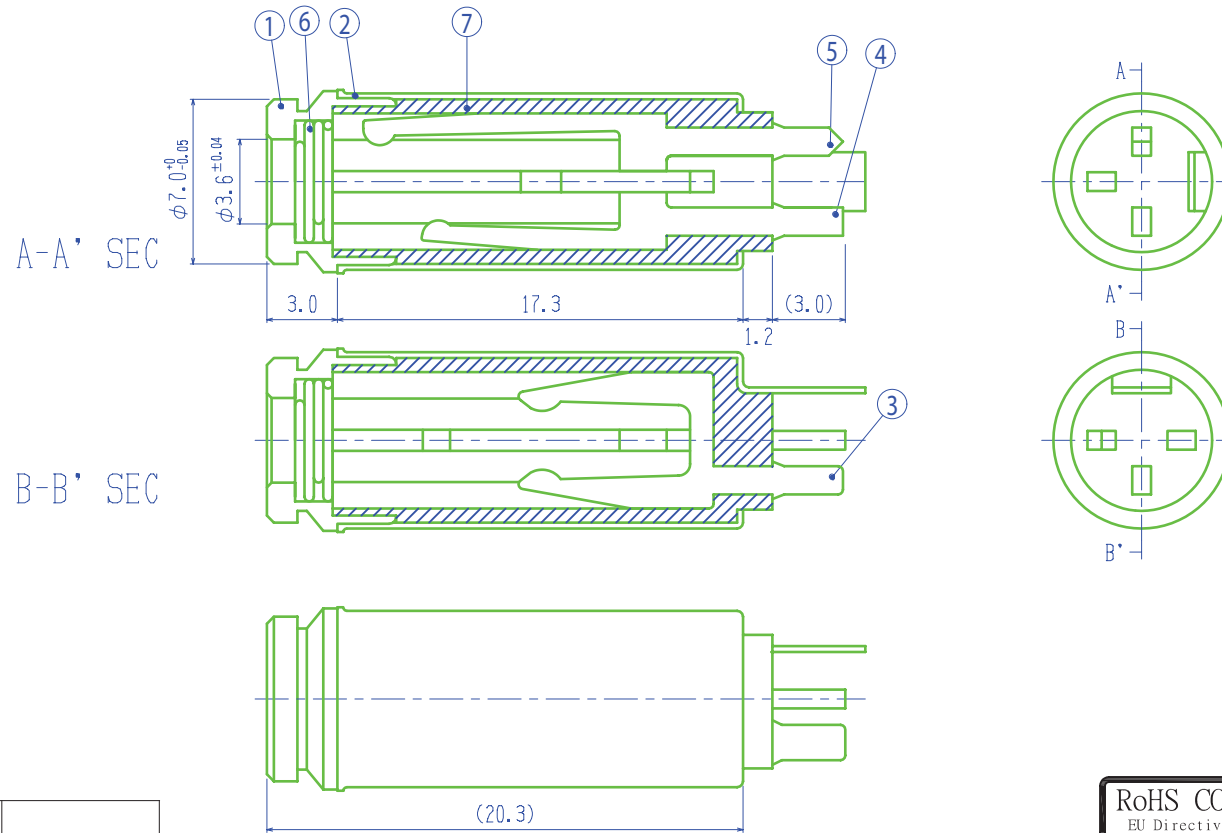

7	PLASTIC CASE	PA-G15	
6	SPRING	SWTC-80C	
5	RING CONTACT	C5210R-H	MB-Cu-Ni-AgF
4	RING CONTACT	C5210R-H	MB-Cu-Ni-I
3	TIP CONTACT	C5210R-H	MB-Cu-Ni-AuF
2	GROMMET	C2680R	MB-Cu-Ni-I
1	CAP SLEEVE	C3604BD	MB-Cu-Ni-I
No.	NAME	MATERIAL	PLATING

SPECIFICATION:

Insulation Resistance: DC500V 100MΩ max.

Dielectric Strength: AC500V 1min.

Mating Force: 4~40N

Unmating Force: 4~40N

DIMENSIONS RANGE	TOLERANCE UNLESS SPECIFIED
0.5<X<1	±0.1
1<X<6	±0.15
6<X<18	±0.2
18<X<50	±0.3



Phone 1-800-809-2751

Fax 1-510-440-0579

www.connect-tech-products.com • info@connect-tech-products.com

4428 Technology Drive • Fremont, CA 94538, USA • 510-498-8815 • Fax: 510-440-0579