


CABLE: UL 2725 USB 2.0 Version
 CONDUCTOR: (28AWG*1P/PAIR)+28AWG*2C+AL/MYLAR+DRAIN WIRE+BRAID
 JACKET: PVC , OD: ϕ 3.8 \pm 0.1mm
 COLOR: BLACK

WIRING DIAGRAM

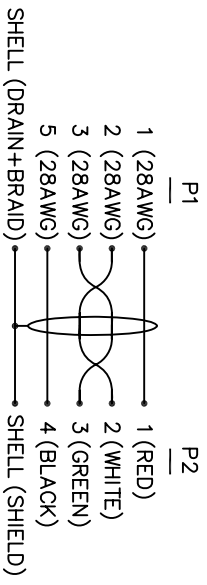

PART NUMBER
 CTP - 902222 - 5 0 0 - 0 4 0
 SERIES
 CABLE LENGTH : 500mm

Connect-Tech Products Corp.
 TEL: +1 510 4400578 www.Connect-Tech-Products.com

TOLERANCES
 XX ±1.0
 X.XX ±0.5
 X.XXX ±0.3
 Angle ±5°

CABLE ASSEMBLY SERIES		DRAWN BY		CHECKED BY		APPROVED BY	
TITLE MICRO B-TYPE 5P M TO USB A-TYPE M L=500mm		<i>Georas</i>		<i>Q. Q. M</i>		<i>Shon</i>	
UNIT	SCALE	SIZE	DRAW NO.	REV.			
MM	NONE	A4	D090-22040	A			

NOTE	DESCRIPTION
1	MICRO B-TYPE 5PIN (MALE) 180°, PIN: GOLD FLASH&SHELL: NICKEL PLATED
2	UL 2725 (28AWG*1P)+28AWG*2C+AEB CABLE
3	USB A-TYPE (MALE), PIN: GOLD FLASH&SHELL: NICKEL PLATED

REV.	DATE	DESCRIPTION
A	0912,2012	RELEASE