


CABLE: UL 2725 USB 2.0 Version  
 CONDUCTOR: (28AWG\*1P/AlR)+28AWG\*2C+AL/MLYAR+DRAIN WIRE+BRAID  
 JACKET: PVC , OD:  $\phi 3.8 \pm 0.1$ mm  
 COLOR: BLACK

WIRING DIAGRAM

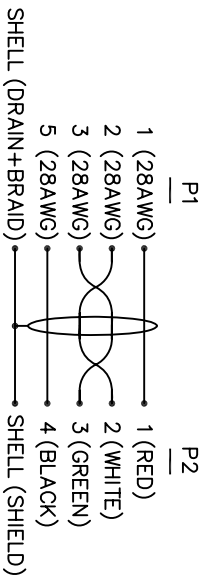

**PART NUMBER**  
 CTP - 902222 - 5 0 0 - 0 4 0  
 SERIES  
 CABLE LENGTH : 500mm

**Connect-Tech Products Corp.**  
 TEL: +1 510 4400578 www.Connect-Tech-Products.com

**TOLERANCES**  
 XX ±1.0  
 X.XX ±0.5  
 X.XXX ±0.3  
 Angle ±5°

CABLE ASSEMBLY SERIES		DRAWN BY		CHECKED BY		APPROVED BY	
TITLE MICRO B-TYPE 5P M TO USB A-TYPE M L=500mm		<i>Georas</i>		<i>G. G. M</i>		<i>Shon</i>	
UNIT	SCALE	SIZE	DRAW NO.	REV.			
MM	NONE	A4	D090-22040	A			

NOTE	DESCRIPTION
1	MICRO B-TYPE 5PIN (MALE) 180°, PIN: GOLD FLASH&SHELL: NICKEL PLATED
2	UL 2725 (28AWG*1P)+28AWG*2C+AEB CABLE
3	USB A-TYPE (MALE), PIN: GOLD FLASH&SHELL: NICKEL PLATED

REV.	DATE	DESCRIPTION
A	0912.2012	RELEASE