



# CTP-25402-S-09

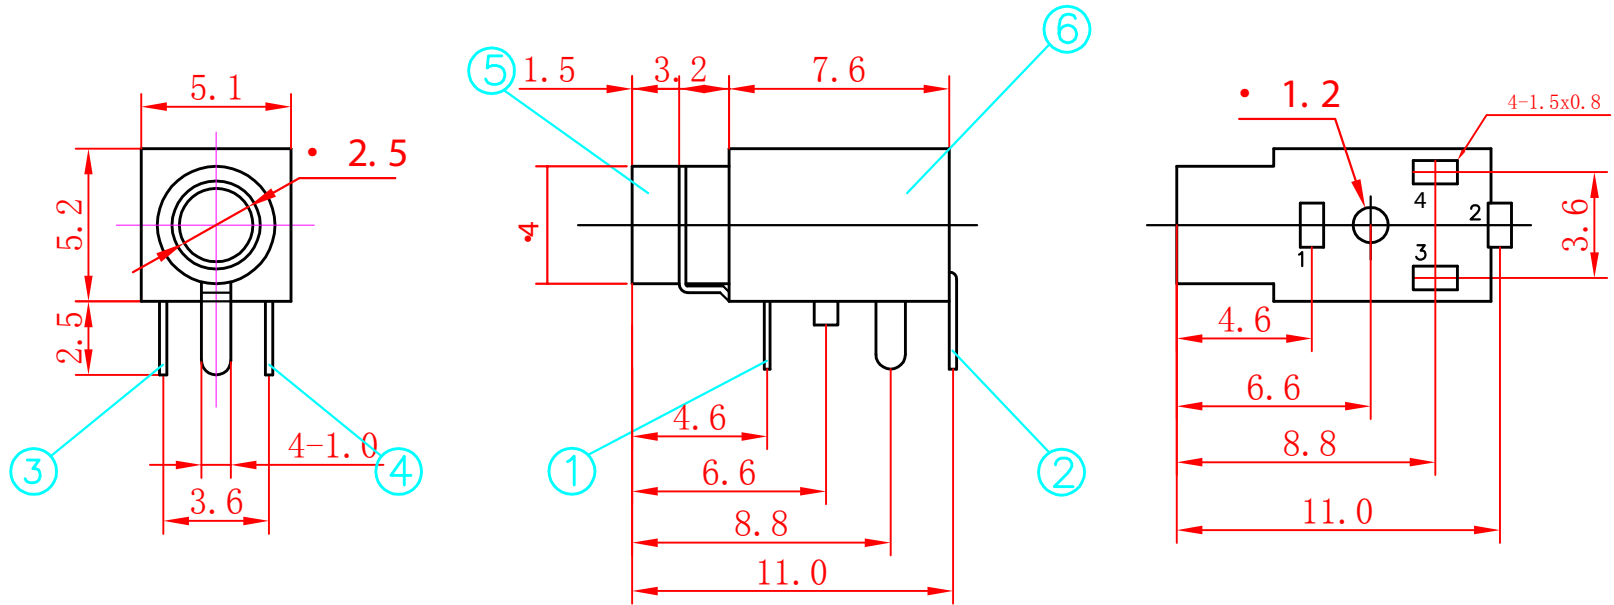

- |                            |                        |
|----------------------------|------------------------|
| Working condition:         | • - 40 to 55 C degrees |
| Ratings:                   | • DC 30V 0.5A          |
| Contact Resistance:        | • 0.03-Ohm             |
| Insulation Resistance:     | • 100M Ohm DC250V      |
| Withstanding:              | • AC 500V(50Hz)/ min.  |
| Insertion & Pulling force: | • 3 to 20N             |
| Life Cycle:                | • 5000 cycles*         |



Phone 1-800-809-2751



Fax 1-510-440-0579

www.connect-tech-products.com • info@connect-tech-products.com

4428 Technology Drive • Fremont, CA 94538, USA • 510-498-8815 • Fax: 510-440-0579