
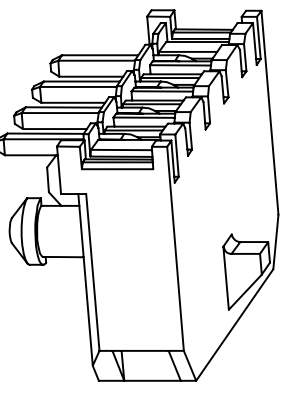
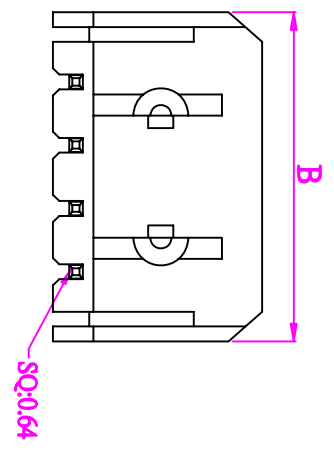
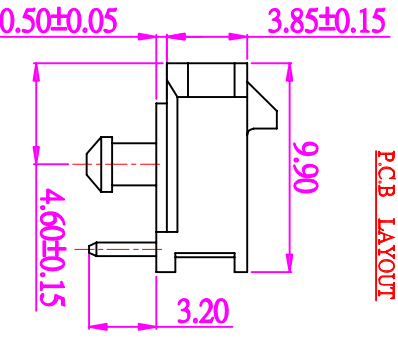


Material: Pin:Brass Tin-Plated
 Base:PBT+30%GF UL94-V0,Black
 Circuits:2-12
 Contact Resistance:10mΩMax
 Insulation Resistance:1000MΩ Min
 Withstanding Voltage:1500V AC/minute
 Current Rating:5A AC,DC
 Voltage Rating:250V AC,DC
 Temperature Range:-25°C~+85°C

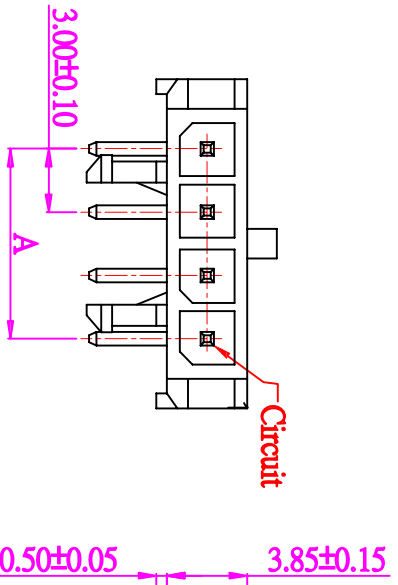

PART NUMBER
 CTP - 13KB - X X T 0 - 0 1 1
SERIES
 NUMBER OF POS. NUMBER OF POS.
 (01~12 POS.)

TIN PLATED ON CONTACT

Dimensions

circuit	A	B
1	--	6.65
2	3.00	9.65
3	6.00	12.65
4	9.00	15.65
5	12.00	18.65
6	15.00	21.65

circuit	A	B
7	18.00	24.65
8	21.00	27.65
9	24.00	30.65
10	27.00	33.65
11	30.00	36.65
12	33.00	39.65

Connect-Tech Products Corp.

TEL:+1 510 4400578 www.Connect-Tech-Products.com

TOLERANCES	WAFER SERIES
XX ±0.3	3.00mm PITCH, MICRO FTT, DIP
X.XX ±0.2	STRAIGHT ROW, RIGHT ANGLE
X.XXX±0.1	
Angle ±5°	

REV.	DATE	DESCRIPTION	UNIT	SCALE	SIZE	DRAW NO.	REV.
A	0607.2010	RELEASE	MM	NONE	A4	D013-KB011	A

1 2 3 4 5 6 7 8