

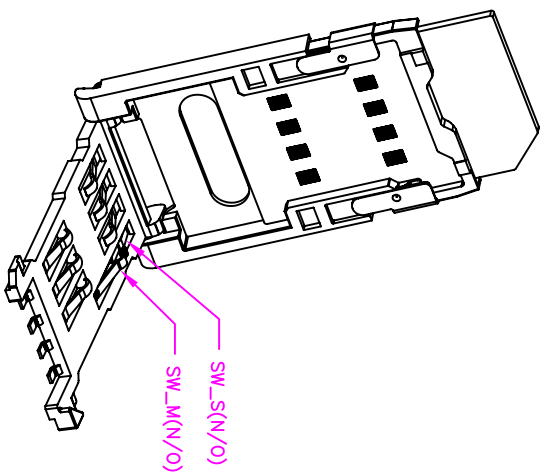
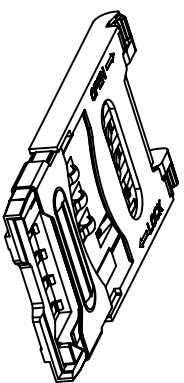


SECTION A-A

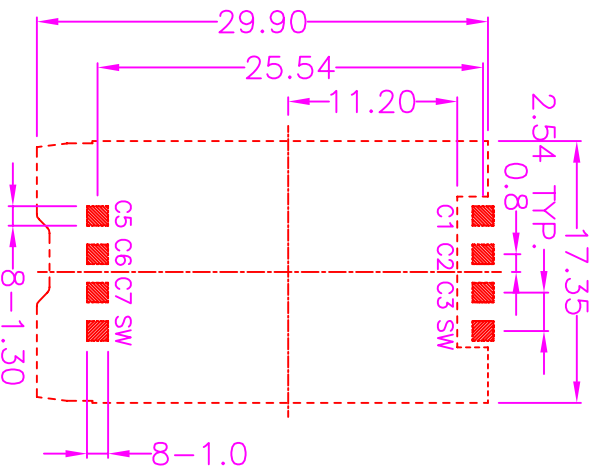

**MATERIALS**  
 HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK  
 SHELL: STAINLESS STEEL  
 TERMINAL: PHOSPHOR BRONZE, GOLD PLATED ON CONTACT  
 AREA TIN PLATING ON SOLDER TAIL

**SPECIFICATION**  
 CURRENT RATING: 0.5 AMP MAX  
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE  
 CONTACT RESISTANCE: 30m OHMS MAX  
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V  
 OPERATION TEMPERATURE: -25°C~+85°C

**PART NUMBER**  
 CTP - 40GB - 0 6 1 T - 0 3 3  
 SERIES }  
 NUMBER OF POS. }  
 TIN PLATED ON TAIL  
 GOLD FLASH ON CONTACT

**Connect-Tech Products Corp.**  
 TEL:+1 510 4400578 www.Connect-Tech-Products.com

<b>TOLERANCES</b>	
TTITLE	MEMORY CARD SERIES
DRAWN BY	SIM CARD, 6PIN, PCB MOUNT, SMT, METAL SHIELD, FEMALE, HINGE TYPE WITH SWITCH
CHECKED BY	
APPROVED BY	

XX ±0.3	
X.XX ±0.2	
X.XXX±0.1	
Angle ±5°	

UNIT	SCALE	SIZE	DRAW NO.	REV.
MM	NONE	A4	D040-GB033	A

REV.	DATE	DESCRIPTION
A	0115.2009	RELEASE

