
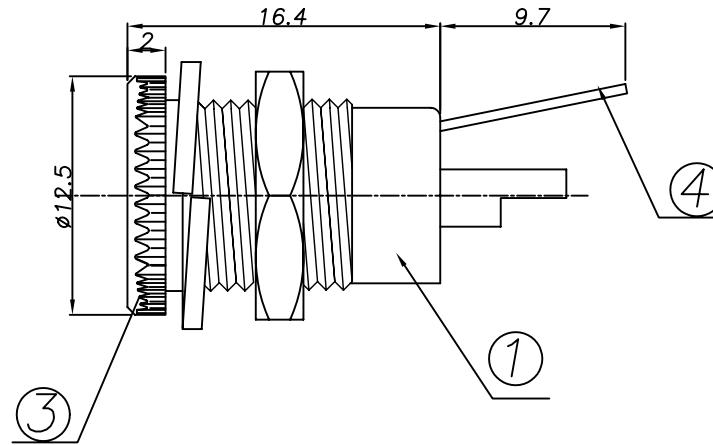



DCP-2828-20

DCP-2828-25

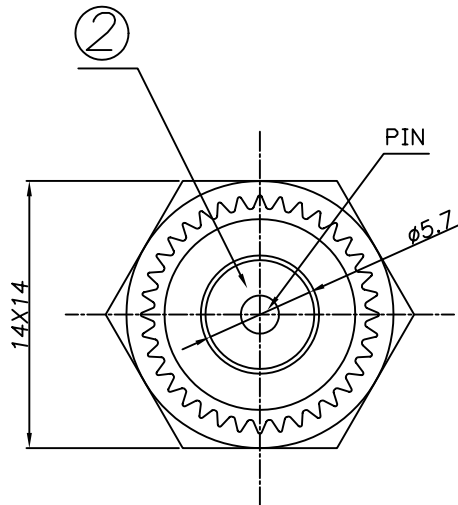

PIN	ø2.0	ø2.5
APPD.	-20	-25

SCHEMATIC



SPECIFICATION

1. Rating : DC 30V 2.5A;
2. Contact resistance: $\leq 30\text{m}\Omega$;
3. Insulation resistance: $\geq 100\text{M}\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-30N;
6. life test: 5,000 cycles.

④	Wire Lead	2	Brass	DC00990-01	Sn-Plating
③	Contact Spring	1	Spring Steel	DC00990-66	Sn-Plating
②	PIN	1	Brass	DC00990-99H/J	Ni-Plating
①	Housing	1	Brass	DC00990-S1	
NO.	DESCRIPTION	QTY	MATERIAL	PART NO.	PLATING



Phone 1-800-809-2751

Fax 1-510-440-0579

www.connect-tech-products.com • info@connect-tech-products.com

4428 Technology Drive • Fremont, CA 94538, USA • 510-498-8815 • Fax: 510-440-0579